

FISCHBEIN-INGLETT™

BP - 200


Bag Placer™ System

Fast

Versatile

Quick changeover

If you're looking to automate your bag-hanging operation, Fischbein-Inglett's cost-effective BP-200 Bag Placer system is your answer. Today's economy demands smart solutions, and for bagging operations, the BP-200 Automatic Bag Placer is one of the smartest.

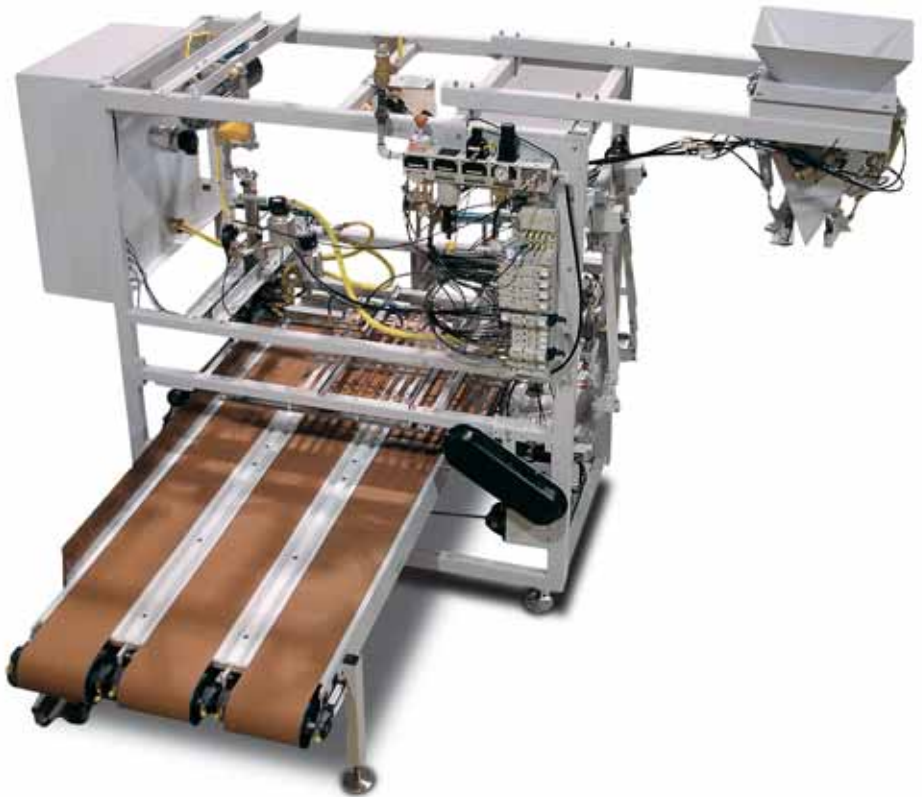

Now you can afford to eliminate the time and cost associated with having to manually hang bags on your bagging-scale. The BP-200 features a self-contained, adjustable vacuum system that allows the unit to pick and handle a full range of bag types, from woven and laminated polypropylene to multi-wall paper bags.

Depending on bag quality and product-flow rates, the BP-200 can process up to 20 bags per minute. The unit's horizontal, three-position bag magazine handles both flat and gusseted bags up to 6 inches wide and bag sizes ranging from 24 to 56 inches in perimeter and 24 to 40 inches in length.

- **OSHA operator safety package**
- **Quick-change feature adjusts bag width and perimeter**
- **Solid-state programmable controller**
- **Sensor system, no bag/no dump protocol**
- **Adjustable, self-contained vacuum system**
- **Quick-disconnect bag clamps**

Options include a series of mild and stainless steel bag clamps, manual override system, vacuum-system blowout, automated bag-closing conveyor and expanded bag magazine holding up to 500 empty bags.

Smart Solutions™

www.fischbein.com

FISCHBEIN-INGLETT™

BAG-WEIGHING AND HANDLING




Control panel
Easy-to-use panel view allows the operator to control the system's bagging cycle and operating programs.



Three-position magazine
Two standby and one active bag-feed stations allow the operator to safely replenish empty bags while the BP-200 is running.



Quick-change bag spout
Bag-size changeovers can be made in less than 10 minutes.

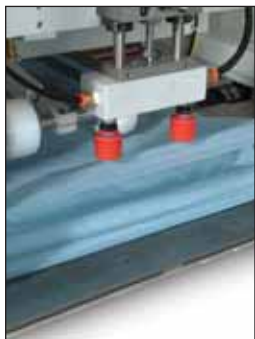

Vacuum bag-top opener
Opens and controls the mouth of each bag before it is positioned on the bag-filling spout.

BP - 200

Bag Placer™ System

Equipment Specifications

Dimensions

	BP-200	Bag Conveyor
Width	42 inches	.46 inches
Height	91 inches	.23 inches
Depth	127 inches	.98 inches
Shipping weight	2,100 pounds	.1,000 pounds

Standard electrical

Power supply 460/3/50-60
Maximum current 15 amps

Pneumatic

Compressed air source . . . 100 PSI – 80 SCFM

Bag specifications

Bag face width 11-20 inches
Bag length 40 inches maximum
Flat bags
Gusseted bags 4-inch-wide gussets woven, poly
6-inch-wide gussets, paper

Smart Solutions™

www.fischbein.com

FISCHBEIN-INGLETT™

BAG-WEIGHING AND HANDLING

Fischbein Company
151 Walker Road
Statesville, N.C. 28625
704.871.1159
Fax 704.872.3303
sales@fischbein.com

Fischbein and Inglett are registered trademarks of Fischbein Company